


Insertion (in-line)

typical application
shown with
anti-blow-out
316 SS compression fitting
(P/N cmp34s/ab)

cmp34s/ab

Mounting

1-1/2 inch PVC
or equivalent

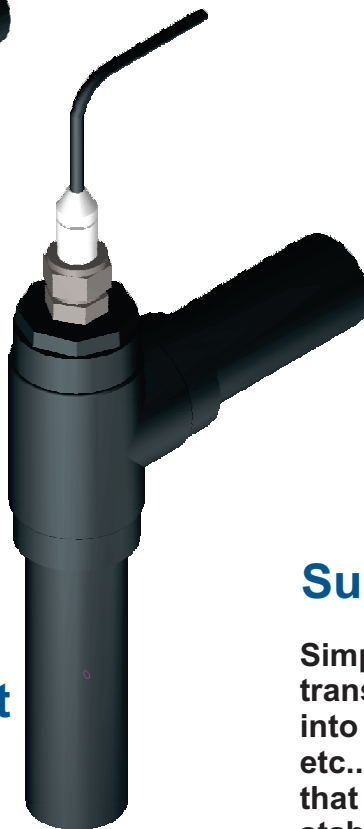

Submersion

Simply lower the transmitter and cable into the tank, lake, well, etc.. For applications that require more stability and/or protection of the cable and transmitter from mixers, chemical injection points, etc. -- reverse the cmp34s compression fitting and mount at the end of a standpipe or equivalent, as shown. (Conductivity transmitter shown in example at right)

